

Manual

# Square drums



June 2018

# Washing

The washing instructions below apply to the cleaning of all CurTec packaging products that are made of polyethylene and polypropylene:

Best results will be achieved with a washing installation that is equipped with spray nozzles or a so-called Ultra-Sonic installation.

Best qualified detergent is a low-foaming alkaline substance with a PH-value of 10 to 12 (solvents.)

The recommended temperature of the washing water lies between 40°C and 50°C.

The temperature of the rinsing water can only be up to 65°C.

Washing at maximum temperature can only take up to 35 seconds and rinsing at maximum temperature only up to 20 seconds. It prevents the plastic from warming up and shrinking.

Increased drying of products can be effected by means of applying cold air. If warm air will be used the drying can only last up to 30 seconds at a maximum temperature of 65°C.

The blowing and drying part of the installation needs to be adjusted to the product, so those difficult spots of the kegs can also be dried.


For specific technical information CurTec would like to refer to the various suppliers of washing installations.

***Attention! Check the thermostat and programmed times of your equipment regularly.***

# 01 Close



The UN marking on a drum is only valid if the following closing instruction is applied.

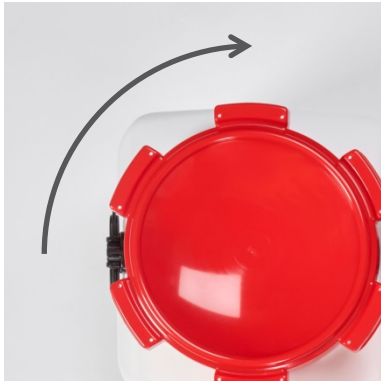

1. Put the lid on the drum and turn it clockwise until it is tight.



2. Turn the lid 30° clockwise using a tool. Only now the drum is closed liquid tight and the UN marking is valid.



3. After closing the drum you can make the container tamper evident. For that purpose the lid and the container have sealing loops. CurTec advises you to use Unisto Compact seals.

Put the tail of the sealing strip into the sealing loops of the lid and drum. Push the tail trough the eye of the sealing strip and pull close.

4. The drum is now sealed.

**Remark:** *Sealing the drum is not a requirement for the validity of the UN marking*

## 02 Open



1. In case a drum is sealed, cut the seal and remove it from the loops.

**Attention!** Do not tear the sealing strip loose. This might damage the sealing loop on the drum.



2. Turn the lid counter-clockwise to open.

### Unstacking

Due to the weight of the stack on top, the rubber gasket can get compressed and needs time to recover. After unstacking, CurTec strongly advises users to leave the drums in an upright position for at least 15 minutes prior to opening. This allows the the rubber gasket to return to its original shape and guarantee an optimal closure.

## 03 Use

### Filling

The temperature of the content cannot exceed 70°C. The content has to cool down to 30°C before the container can be closed. The drum can be closed according to instruction 1.



### Lifting

The drum can be lifted with the mounted handgrips.

**Attention!** Please consider the HSE regulations regarding weight and frequency restrictions for lifting

### Charging the handgrip

The mounted handgrips have been designed for manual displacement of drums only. They are not suitable for mechanical handling, such as lifting a drum with a hoist. The handgrip is suited for a brief, controlled charge of maximum 80 kg and a couple of minutes, during which the handgrip cannot be torqued.

### Freezing

The drums are made of plastic which is resistant to a minimum temperature of -25°C. As of -5°C, shock load on the drums should be avoided.

**Attention!** The volume of drums filled with water-based contents can increase by 10%. The chances that drums will distort is real and it will reduce the stability of a drum stack on a pallet. Please maintain a maximum filling level of 90% and test the stability of a pallet stacking.



### **Air transport**

During air transport, the pressure drops inside a plane's cargo hold, which causes air inside a package wanting to escape. After landing, normal atmospheric pressure prevails again which, depending on the amount of escaped air\*, can cause the drum wall to cave in.

CurTec packaging has not been designed to compensate large pressure differences short-term. The construction is such that a correctly closed packaging allows air to escape relatively fast, but does not allow it to return easily.

Since CurTec has no influence on the use of its packaging by end users, they advise to test each transport mode.

It remains the responsibility of end users to verify whether a package and content comply with relevant transport regulations. CurTec refers to the regulations mentioned in the UN certificates.

*\* The quantity depends on the content type (the shape and air between) and the filling degree/ level*

## 04 Static load

When stacking drums for storage in e.g. a warehouse or cold store, it is important to know what the maximum load on the lowest drum in a stack can be.

The stacking load depends strongly on: the weight of a drum, the number of drums to be stacked, the weight of interlayers and pallets, the ambient temperature, the duration of the load and the surface beneath the lowest drum.

The following table shows the maximum stacking load (in kg) at a given ambient temperature, during a certain period of time, for a drum placed on a flat, closed surface or pallet.

Max. temp in °C	0	0	0	15	15	15	25	25	25	35	35
Months	1	4	12	1	4	12	1	4	12	0,5	6
<b>7440</b>	302	254	222	196	165	144	147	124	108	120	88
<b>7450</b>	302	254	222	196	165	144	147	124	108	120	88
<b>7466</b>	302	254	222	196	165	144	147	124	108	120	88
<b>7480</b>	302	254	222	196	165	144	147	124	108	120	88

**Attention!** The weights mentioned in the table have been established after simulation and can only serve as indications. CurTec recommends users to perform tests at all times.

The table allows you to calculate the number of drums that can be stacked: Reduce the stacking weight mentioned with the relevant share of the weight of intermediate layers and divide by the weight of the drum with content. This number, with a figure after the decimal point lower than 8, rounded down is the total amount of drums that can be stacked on the lowest drum of a stack.

### Example

How many 66 litre Square Drums (art. no. 7466) with a content weighing 65 kg can be stacked on a pallet at 15°C during one month?

The relevant weight share of intermediate layers is 6 kg, so  $(196-6)/65 = 2.92$ . The number of drums that can be stacked on the lowest drum is 3.

In case of a different duration or temperature, please choose the next appropriate column. For shorter stacking durations, the table of instruction 5 (Dynamic load) can be of service.

**Attention points**

Before stacking the drums, the temperature of the contents must be equal or lower than the ambient temperature.

The maximum stacking time is reduced considerably at temperatures above 35°C. The stacking load in the table is at 50°C only 75% of the last mentioned value and at 60°C only 50%.

When a stack is higher than 2.5 metres, the floor angle cannot exceed 0.5%.

CurTec strongly discommends stacking drums horizontally, lying on the side.

When changing transport mode, from storage to shipping or vice versa, the lowest drums of a stack must always be placed highest in a new stack.



## 05 Dynamic load

When stacking drums for transport, it is important to know what the maximum load on the lowest drum in a stack can be.

For transport, this stacking load is called dynamic load and can be found by dividing the admissible static load by a so-called safety factor. These factors are:

*3 for air transport*

*2 for road transport*

*1,8 for rail transport*

*1,3 for maritime transport*

The stacking weights mentioned in the table below are indicative and depend on temperature and time: 5°C is the temperature for cooled transport, 30°C is the temperature for the average transport by road or inland waterways and 40°C is the temperature for transport in warmer surroundings. In case of a different duration or temperature below 40°C, please choose the next appropriate column. In case of even higher temperature, please consider that the dynamic load is at 50°C only 75% of the last mentioned value and at 60°C only 50%

Max. temp in °C		5	5	5	5	5	30	30	30	30	30	40	40	40	40	40
Weeks		0,5	1	2	3	5	0,5	1	2	3	5	0,5	1	2	3	5
<b>7440</b>	<b>A</b>	264	242	222	211	198	129	118	108	103	96	96	88	81	77	72
<b>7450</b>	<b>B</b>	191	175	160	152	143	93	85	78	74	70	70	64	59	56	52
<b>7466</b>	<b>C</b>	172	157	144	137	129	84	77	70	67	63	63	57	53	50	47
<b>7480</b>	<b>D</b>	114	105	96	91	86	56	51	47	45	42	42	38	35	33	31

**A** Maritime transport

**B** Rail transport

**C** Road transport

**D** Air transport

**Attention!** The weights mentioned in the table have been established after simulation and can only serve as indications. CurTec recommends users to perform tests at all times.

The table allows you to calculate the number of drums that can be stacked: Reduce the stacking weight mentioned with the relevant share of the weight of intermediate layers and divide by the weight of the drum with content. This number, with a figure after the decimal point lower than 8, rounded down is the total amount of drums that can be stacked on the lowest drum of a stack.

**Example**

*How many 50 litre Square Drums (art. no. 7450) with a content weighing 60 kg can be transported by road at 30°C during 2 weeks?*

The relevant weight share of intermediate layers is 6 kg, so  $(70-6)/60 = 1.07$ . The number of drums that can be stacked on the lowest drum is 1.

**Attention points**


When changing transport mode, from storage to shipping or vice versa, the lowest drums of a stack must always be placed highest in a new stack.

The drums must be stowed professionally and fixed in such a way that makes moving impossible.

For the use of pallets, see instruction 6 (Palletisation).

For stacking drums in a warehouse, see instruction 4 (Static load).

## 06 Palletisation

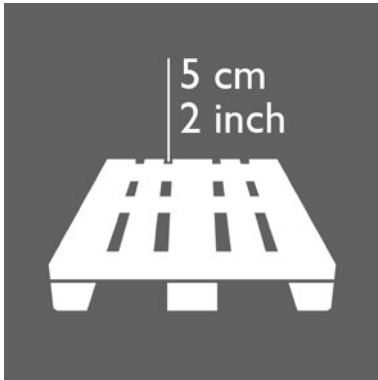

### Palletisation

Each pallet should be fitted with a solid, flat intermediate layer prior to loading. A pallet should have an almost closed surface fitted with planks that are no more than 5 cm/ 2 inches apart. CurTec advises not to exceed a total stacking height of 2 metres.

In case a pallet is placed on top of another pallet, an intermediate layer is required to enable an equal spread of the pressure. This layer should also be solid and flat.



### Pallet handling

From a safety point of view, CurTec recommends to transport only one pallet at a time with a fork lift truck. In order not to disturb the stack, the forks of the truck need to be kept almost horizontal.


### Packing

CurTec recommends the use of a shrink wrap, which needs to be shrunk around the pallet as well. In addition, the base of the pallet needs to be stretched with foil as well. The containers at the base of a stack will carry most of the load and to avoid a collapse they cannot be deformed by overstretching the foil or over-heating the wrap.


Alternatively you can use stretch foil to cover the entire pallet. Please make sure that you use enough foil to create a stable stack and do not pull the foil too tight in order to avoid deformation of the containers.

### Pallet schemes


CurTec advises you to respect the following quantities per layer:

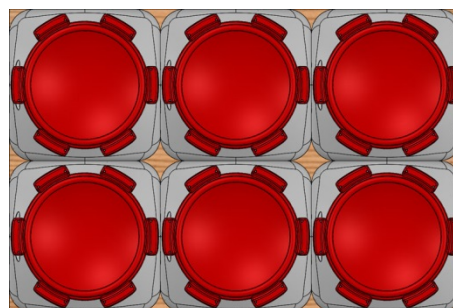


1140 x 760 mm

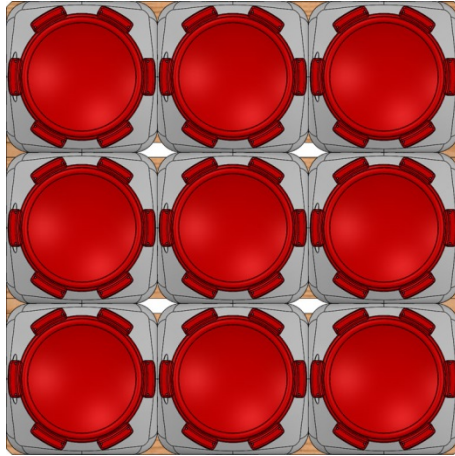

1140 x 1140 mm  
44 x 44 inches



1200 x 800 mm



1200 x 1000 mm  
48 x 40 inches

**Disclaimer**

CurTec manufactures packaging material for a wide range of purposes. This declaration is restricted to the packaging material as it leaves the production facility. CurTec has neither control over final end use of the product nor over processing conditions. It is therefore the responsibility of the end user to check compliance with the relevant regulations and to validate material performance in the end application through proper end use testing.

**CurTec International**

Spoorlaan Noord 92  
5121 WX Rijen  
The Netherlands



UK & Ireland: +44 20 3514 4624  
North America: +1 908 450 98 16  
All other countries: +31 88 808 2000



[curtec.en@curtec.com](mailto:curtec.en@curtec.com)

**curtec.com**